

不锈钢电阻柜(SRA) SUS Resistor Assemblies

■ 产品概述(Product Introduction)

该电阻柜可用在变频器控制电机减速和制动的电路中，通常外接电阻器可以将来自电动机和负载的多余能量消耗掉，以保护变频器。在工业系统中，变频器制动电阻被广泛应用于电机起动制动调速、变频器制动、起吊行业大型机械制动、物料输送机构制动等领域。它们可以短时断续周期和持续的工作。

SRA can be used in the circuit where the converter controls the deceleration and braking of the motor and the excess energy from the motor and load can be consumed by the resistor assemblies to protect the converter. In industrial systems, converter braking resistors are widely used in motor starting and braking speed regulation, converter braking, large mechanical braking in the lifting industry, and material conveying mechanism braking, etc. They can operate both in short intermittent cycles and continuously.


额定电流范围Rated Current Range:10 ~ 1000A

额定电压范围Rated Voltage Range:220 ~1140V

■ 执行标准 (Applicable Standard)

GB/T5729 Fixed resistors used in electronic equipment

■ 产品尺寸图(Product Size)

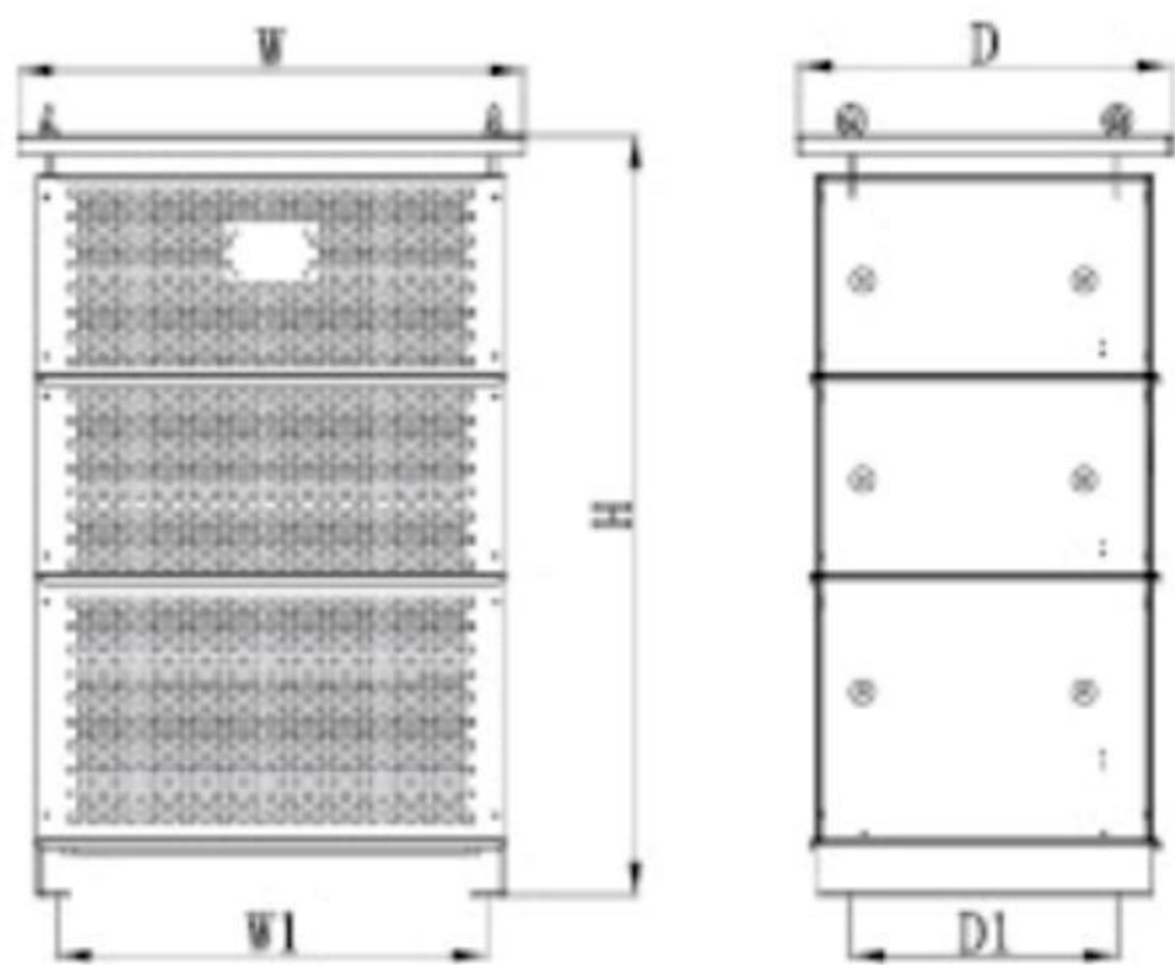

规格 Type	功率 (kW) Power	尺寸Dimension(±1mm)				
		W	D	H	W1	D1
SRA	5	450	500	481	394	440
SRA	10	760	560	542	644	400
SRA	20	760	560	842	644	400
SRA	30	760	560	1140	644	400
SRA	40	760	560	1440	644	400
SRA	50	760	560	1740	644	400
SRA	60-80	880	760	1580	764	600
SRA	85-104	880	760	1930	764	600

备注:其他规格尺寸，可根据用户要求制造。Remark: Customized if necessary.

■ 成品识别码(Product Identification Code)

SRA	6kW	20R	J
不锈钢电阻柜 Aluminum SUS Resist or Assemblies	额定功率 Rated Power	电阻阻值 Resistance	阻值误差 Resistance Tolerance H=±3% J=±5% K=±10%